


VSH2 – SPRING HANGER ISOLATOR

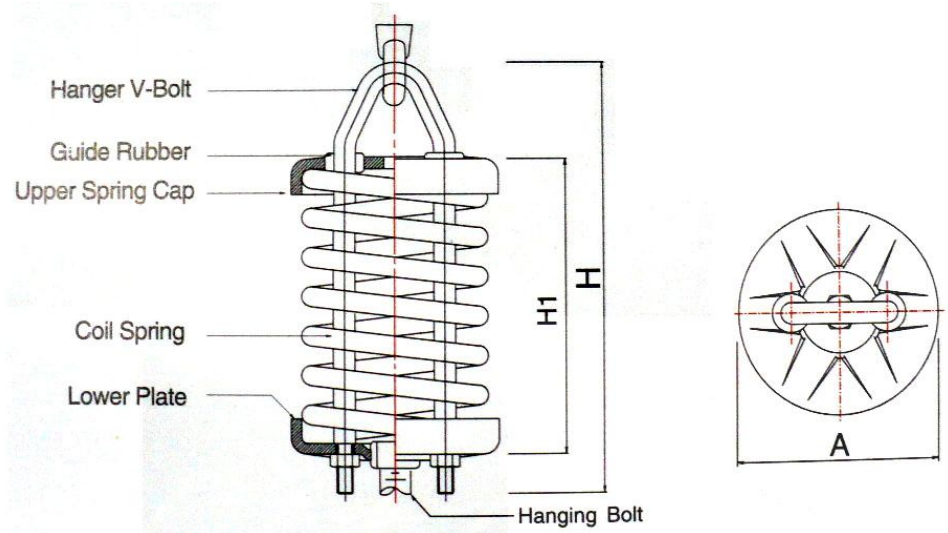

Features

- Spring hanger prevents vibration generated from suspended equipments and thermal expansion forces from conducting to a structure through pipe or duct
- Reliable stability with V-bolt

Usage

- Vibration-proofing for axial, in-line fans, suspended ceiling deck systems and the piping and ducts of machine or air handling rooms, high efficiency.

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (Kg)	Spring Constant (Kgf/mm)	Deflection (mm)	Color	Dimension (mm)					Spring Only	
					A	H	H1	V-Bolt	Hanging Bolt	ØD	Freight height
VSH2-10	10	0.2	50	Pink	106	200	150	M8	M10	95	140
VSH2-25	25	0.5	50	Yellow							
VSH2-50	50	1.0	50	Red							
VSH2-75	75	1.5	50	Black							
VSH2-100	100	2.0	50	Blue							
VSH2-150	150	3.0	50	Brown	106	200	150	M8	M10	95	140
VSH2-200	200	4.0	50	White							
VSH2-300	300	6.0	50	Orange							
VSH2-400	400	8.0	50	Pink							
VS2H-500	500	10.0	50	Green	140	230	180	M12	M12	125	175
VSH2-600	600	12.0	50	Blue							
VSH2-750	750	15.0	50	Black							
VSH2-1000	1,000	20.0	50	Yellow							